


# Navigator K2 In-Wall Keypad

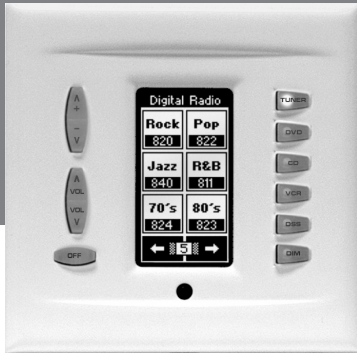

## Sonance Navigator® K2 Keypad


The Navigator K2 is a next-generation hard-key/soft-key keypad that provides sophisticated control of distributed audio and home entertainment systems.

The K2 features programmable hard-key buttons that typically control volume, channel, power and 6 sources, plus a fully-programmable center LCD touch screen that includes up to 12 pages of functions for each programmable control screen. Any hard-key or soft-key button can be used to trigger sophisticated macros. All hard-key buttons are backlit, and the Source buttons can be replaced with the included membranes to match specific system sources.

The Navigator K2 is very easy to program. The new PC-based Sonance Navigator Manager Software allows drag-and-drop programming, and makes it easy to store, modify or even e-mail keypad programs. Installers can easily modify and program multiple K2s. The K2 features a 3-pin serial port behind the trim plate, so the keypad can even be programmed after installation without being removed from the wall.

The K2 fits in some new and retrofit double-gang J-boxes, and its shallow depth of less than 2 inches permits use in international installations. Integral dog toggles allow easy installation in a variety of retrofit situations. Interchangeable button membranes and a programming cable are included.

Sonance Navigator Program Manager software can be downloaded at [www.sonance.com](http://www.sonance.com).



**SONANCE®**

[www.sonance.com](http://www.sonance.com)

212 Avenida Fabricante  
San Clemente, CA 92672-7531 USA  
(800) 582-7777 or (949) 492-7777  
FAX: (949) 361-5151  
Technical Support: (800) 582-0772

## FEATURES

- High-contrast, wide viewing-angle 64 x 128 pixel black & white programmable LCD touchscreen with white LED backlighting
- Programmable backlit hard keys for source, volume, channel and power
- Easy to use and program
- Integral dog toggles allow easy mounting in retrofit installations
- Flexible programming capabilities for use with a majority of control systems
- Easily-programmable via Navigator Program Manager software
- Built-in IR receiver
- Includes 72 interchangeable membranes for easy customization of 6 hard source buttons
- Includes programming cable
- Installation does not require any additional or external hardware
- Power button glows red, green, or orange to indicate zone power status

## SPECIFICATIONS

### Navigator K2 Keypad

IR Output	1 (200mA)
Power Sense input:	1 (monitored)
Relay output:	1 (100mA)
Auxiliary input:	1 (monitored)
Keypad sync I/O port:	1 (Syncs multiple keypads to the same page/source)
Power requirement:	12V DC at 250mA
Dimensions (W x H x D):	4½" x 4½" x 1 <sup>13</sup> / <sub>16</sub> " (114mm x 114mm x 46.5mm)
In-wall dimensions (W x H x D):	3 <sup>11</sup> / <sub>16</sub> " x 3¼" x 1 <sup>13</sup> / <sub>16</sub> " (93mm x 82mm x 46.5mm)
Color:	White (black, almond & ivory available separately)

## ACCESSORIES

### K2 Stud Mount Bracket

The K2 Stud Mount Bracket is installed during construction and serves as a guide for the drywall installer when cutting openings. The Stud Mount Bracket is screwed to the stud when the desired location for the K2 Keypad is directly adjacent to the stud. Once the drywall is installed and cut, the K2 attaches to the bracket using 2" drywall screws.

Available in 6-packs.

