

# SONANCE


## DSP AMPLIFIER DATA SHEET

### DSP 8-130 MKII MULTI-CHANNEL POWER AMPLIFIER

#### TECHNICAL SPECIFICATIONS

SKU	93331
UOM	Each
Number of Channels	8 (4 stereo pair)
RMS per Channel @ 8 Ohms	130 watts (8 channels driven)
RMS per Channel @ 4 Ohms	145 watts (8 channels driven)
RMS per Channel Bridged @ 8 Ohms	300 watts
Frequency Response	5Hz-50kHz
Distortion (1kHz) @ 8 Ohms	0.1%
Distortion (1kHz) @ 4 Ohms	0.03%
AC Voltage	100-120V@60Hz, 220-240V@50Hz
AC Fuse	15A (T15AL - 250V)
Dimensions + Feet (WxHxD)	17.25" x 2.125" x 16.8125" (438mm x 54mm x 427mm)
Dimensions + Rack Ears, No Feet (WxHxD)	19" x 1.75" x 13.8125" (482mm x 44mm x 427mm)
Rack Space Requirement	1U
Shipping Weight	18 lbs. (8.2kg)

#### DIMENSIONAL DRAWINGS

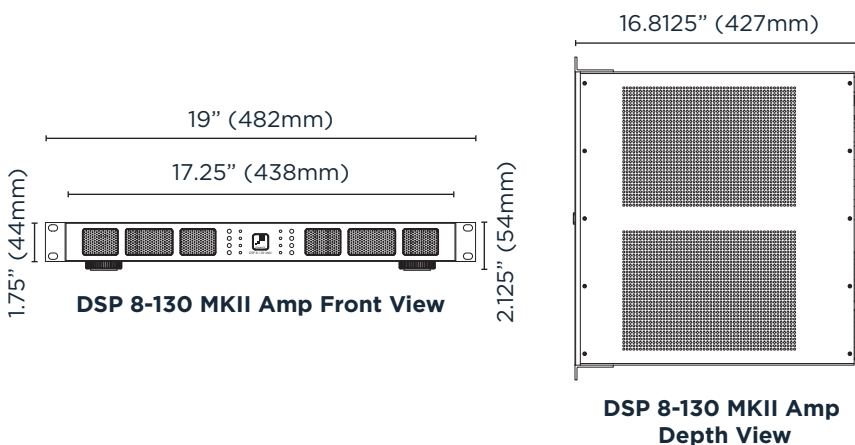

#### OPTIONAL ACCESSORIES

##### MODULES

Digital Input Module (DIM)	93099
Hybrid Input Module (HIM)	93361

#### ASSOCIATED PRODUCTS

##### SONAMP DIGITAL AMPLIFIERS

2-100	93091
12-50	93092

#### LIMITED TWO (2) YEAR WARRANTY

Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. For more details please refer to the product manual.

©2021 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at [www.sonance.com](http://www.sonance.com).

SONANCE • 991 Calle Amanecer • San Clemente, CA 92673 USA • Phone: (949) 492-7777 • Fax: (949) 361-5151 • Technical Support: (949) 492-7777 • [www.sonance.com](http://www.sonance.com) • 03.17.2021