

SONANCE



VISUAL PERFORMANCE EXTREME

Introducing the totally redesigned Visual Performance Extreme line of speakers. Engineered to handle harsh conditions while maintaining superior sound quality, Sonance Extreme Speakers are the perfect choice for patios, bathrooms or marine applications.



VPXT8R




VPXT6R




VPXT6R SST



VPXT6



VPXT6SQ




VPXT8SQ

- The XPC grille retention technology ensures the grille is held securely in place even during high pressure washing
- Designed to withstand extreme temperatures from -30° – 175°F (-34°C – 79°C)

- Conforms to IP-66 waterproof rating and Mil Spec 810 for humidity, salt spray, UV and temperature



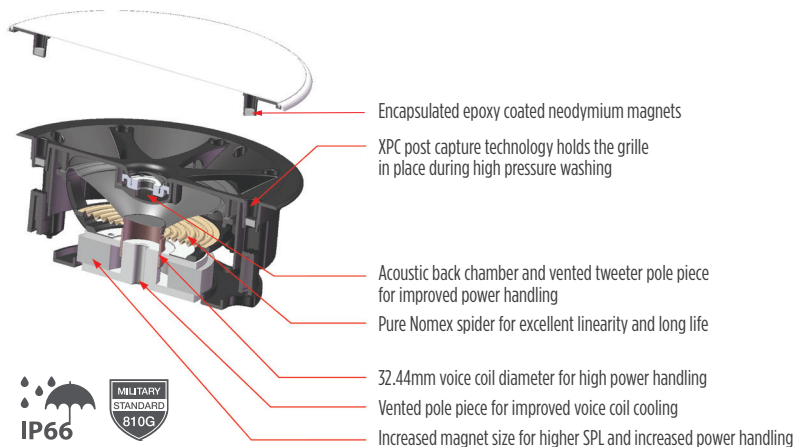

VPXT8R
SKU 93341
MSRP \$1000 PR



VPXT6R
SKU 93339
MSRP \$750 PR



VPXT6R SST
SKU 93340
MSRP \$500 EA



VPXT6
SKU 93338
MSRP \$750 PR

Tweeter:	1" (25mm) polyurethane dome, Ferrofluid cooled, in acoustic back chamber	1" (25mm) polyurethane dome, Ferrofluid cooled, in acoustic back chamber	1" (25mm) polyurethane dome, dual voice coil, Ferrofluid cooled, in acoustic back chamber	1" (25mm) polyurethane dome, Ferrofluid cooled, in acoustic back chamber
Woofers:	8" (205mm) injection-molded polypropylene/graphite cone, with integral Santoprene™ surround	6 1/2" (165mm) injection-molded polypropylene/graphite cone, with integral Santoprene™ surround	6 1/2" (165mm) injection-molded polypropylene/graphite cone, with integral Santoprene™ surround	6 1/2" (165mm) injection-molded polypropylene/graphite cone, with integral Santoprene™ surround
Frequency Response:	40Hz - 20kHz ±3dB	45Hz - 20kHz ±3dB	45Hz - 20kHz ±3dB	45Hz - 20kHz ±3dB
Power Handling:	5 Watts minimum; 130 Watts maximum	5 Watts minimum; 125 Watts maximum	5 Watts minimum; 125 Watts maximum	5 Watts minimum; 125 Watts maximum

SONANCE 

www.sonance.com